
bizhub C4050i Printer Driver Instructions for Mac (Basic Printing)

Follow the steps below to add the Konica bizhub C4050i to your Mac using its IP address.

1. **Open System Settings.**
   Click the Apple menu in the top-left corner and select **System Settings**.
2. **Go to Printers & Scanners.**
   In the left sidebar, click **Printers & Scanners**.
3. **Click Add Printer, Scanner, or Fax…**
   On the right side, click the **Add Printer, Scanner, or Fax…** button.
4. **Wait for the Add Printer window to open.**
   The Add Printer window will appear.
5. **Click the middle globe icon at the top of the window.**
   This allows you to add a printer by IP address.
6. **Enter the printer's information.**
   In the fields shown, enter the following:

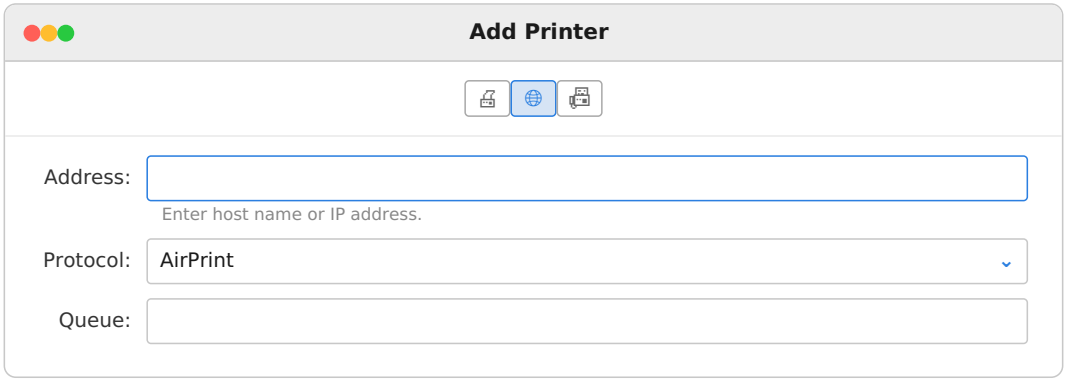

   - **Address:** Enter the printer's IP address (e.g., 192.168.1.50)
   - **Protocol:** Select AirPrint
   - **Queue:** Leave blank
7. **Click Add.**
   Click the **Add** button to add the printer.
8. **Confirm the printer is added.**
   The printer will appear in your Printers & Scanners list and is ready to use.
9. **Test your printer.**
   Print a test page to make sure everything is working correctly.

> *i* **Note:** Both your Mac and the printer must be on the same network for AirPrint to work. If the printer does not appear or fails to print, verify the IP address and network connection.


bizhub C4050i Printer Driver Instructions for Mac (Advanced)

Follow the steps below to install the Konica bizhub C4050i printer driver on your Mac.


Step 1: Download the Driver

1 **Search for the driver.**
Open Google and search for **KMBS Drivers**.


2 **Open Self-Help Product Support.**
In the search results, click **Self-Help Product Support** on mykonicaminolta.com.

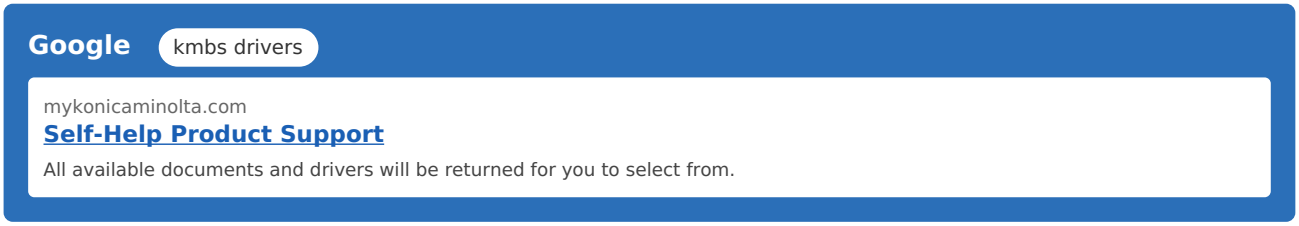

3 **Search the model.**
In the Quick Search box, type **bizhub C4050i** and click the search button.

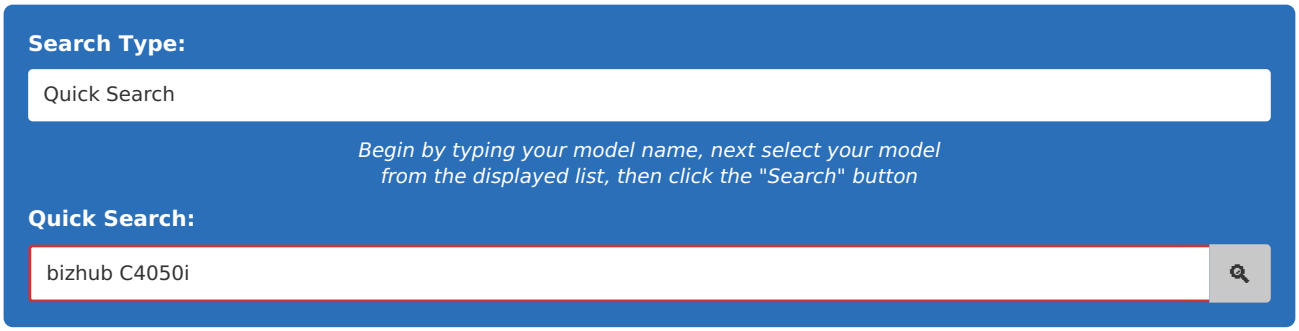

4 **Download the driver.**
Locate the driver that matches your installed macOS version and click to download. The C4050i has dedicated drivers for **macOS Ventura**, **macOS Sonoma**, and **macOS Tahoe** — select the one matching the version of macOS you currently have installed (Ventura is shown highlighted as an example below).

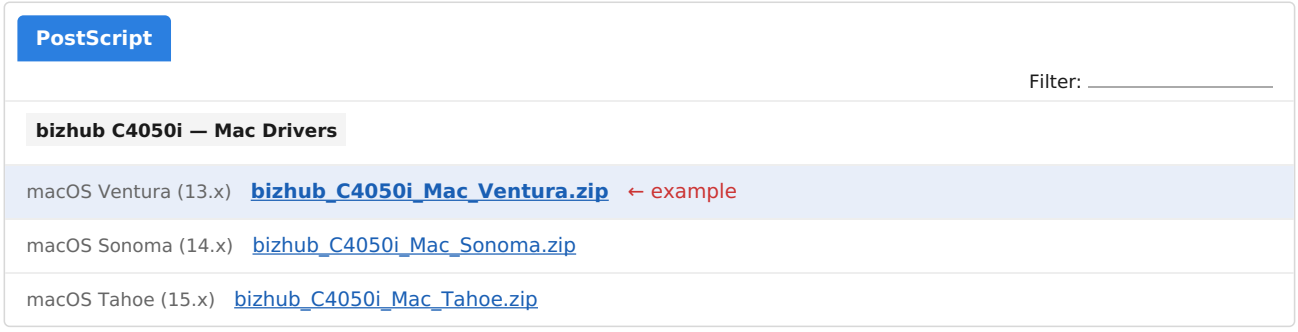


Note: Always download the driver that matches your installed macOS version. To check your version, click the Apple menu → **About This Mac**. Installing a driver for the wrong macOS version may cause printing issues.

Step 2: Add the Printer

1. **Open System Settings.**
   Click the Apple menu in the top-left corner and select **System Settings**.
2. **Go to Printers & Scanners.**
   In the left sidebar, click **Printers & Scanners**.
3. **Click the + button.**
   Click the **+** (Add Printer, Scanner, or Fax…) button on the right side.
4. **Select the IP (globe) tab.**
   At the top of the Add Printer window, click the middle globe icon to add a printer by IP address.
5. **Enter the printer's information.**
   Fill in the following fields:

   - **Address:** Enter the printer's IP address
   - **Protocol:** Select **LPD** (Line Printer Daemon)
   - **Queue:** Leave blank
   - **Name:** Enter a recognizable name for your printer

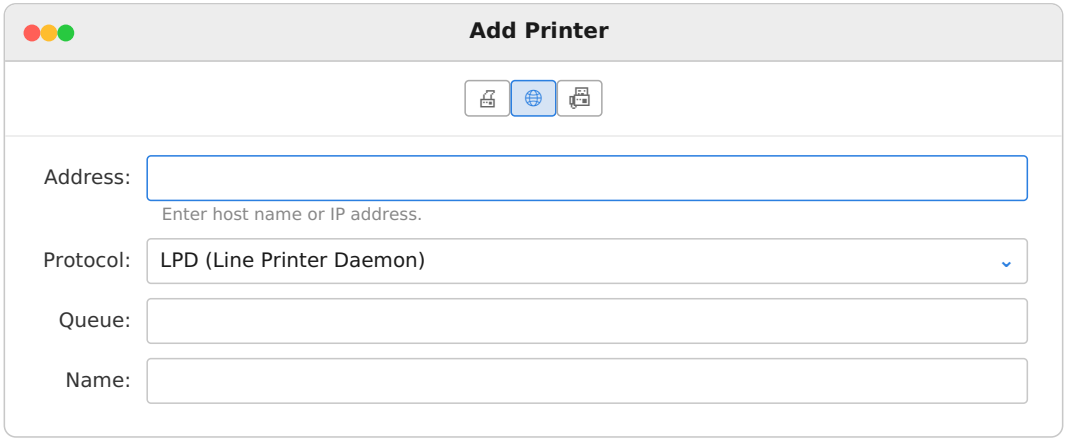

6. **Choose the driver.**
   Click **Choose Driver** → **Select Software**, then choose **KONICA MINOLTA C4050i** from the list.
7. **Click Add.**
   Click the **Add** button to install the printer.

Step 3: Test the Printer

1. **Print a test page.**
   Open any document or use the **Print Test Page** option in **Printers & Scanners** to confirm the printer is working correctly.

> *i* **Installation Complete** — Your bizhub C4050i is ready to use. If the printer does not respond, verify both your Mac and the printer are on the same network, and confirm the IP address is correct.