How to Add an AirPrint Printer Using an IP Address (Basic Printing)

Follow the steps below to add an AirPrint printer to your Mac using its IP address.

1 Open System Settings.

Click the Apple menu in the top-left corner and select **System Settings**.

2 Go to Printers & Scanners.

In the left sidebar, click **Printers & Scanners**.

3 Click Add Printer, Scanner, or Fax…

On the right side, click the **Add Printer, Scanner, or Fax…** button.

4 Wait for the Add Printer window to open.


The Add Printer window will appear.

5 Click the middle globe icon at the top of the window.

This allows you to add a printer by IP address.

6 Enter the printer's information.

In the fields shown, enter the following:

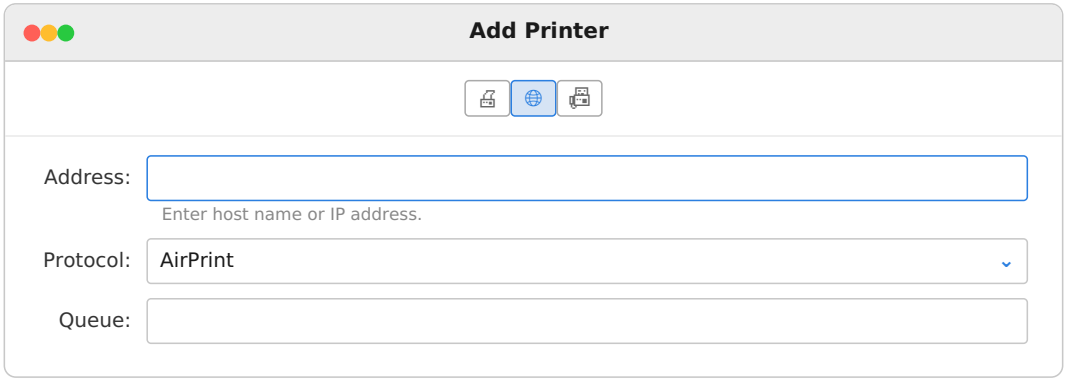

- **Address:** Enter the printer's IP address (e.g., 192.168.1.50)
- **Protocol:** Select AirPrint
- **Queue:** Leave blank

7 Click Add.

Click the **Add** button to add the printer.

8 Confirm the printer is added.

The printer will appear in your Printers & Scanners list and is ready to use.

9 Test your printer.

Print a test page to make sure everything is working correctly.

> *i* **Note:** Both your Mac and the printer must be on the same network for AirPrint to work. If the printer does not appear or fails to print, verify the IP address and network connection.

How to Setup Printing with Konica on Mac (Advanced)

Follow the steps below to install the Konica bizhub C754e printer driver on your Mac and configure advanced finisher options.


Step 1: Download the Driver

1 Search for the driver.

Open Google and search for **KMBS Drivers**.


2 Open Self-Help Product Support.

In the search results, click **Self-Help Product Support** on mykonicaminolta.com.

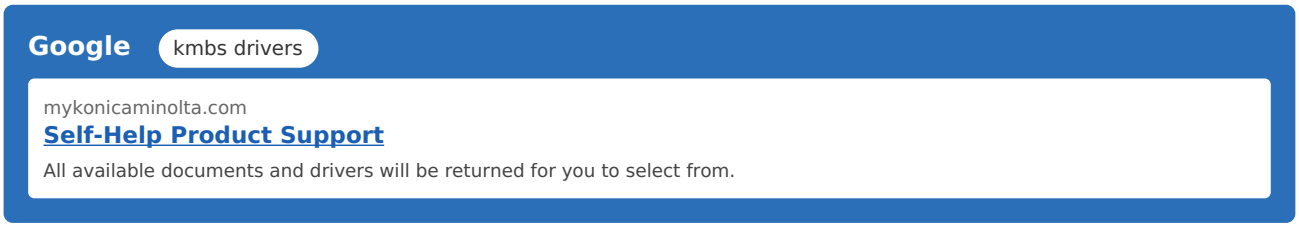


3 Search the model.

In the Quick Search box, type **bizhub C754e** and click the search button.

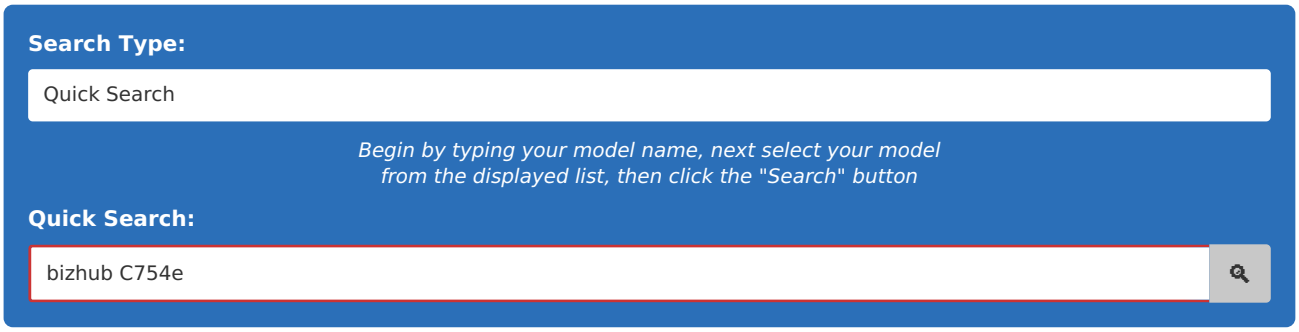

4 Download the driver.

Locate the **Mac OS 13.x (Ventura)** driver in the PostScript section and click to download. Look for the file labeled *C754_Series_v5.11.0A_Letter.zip*.

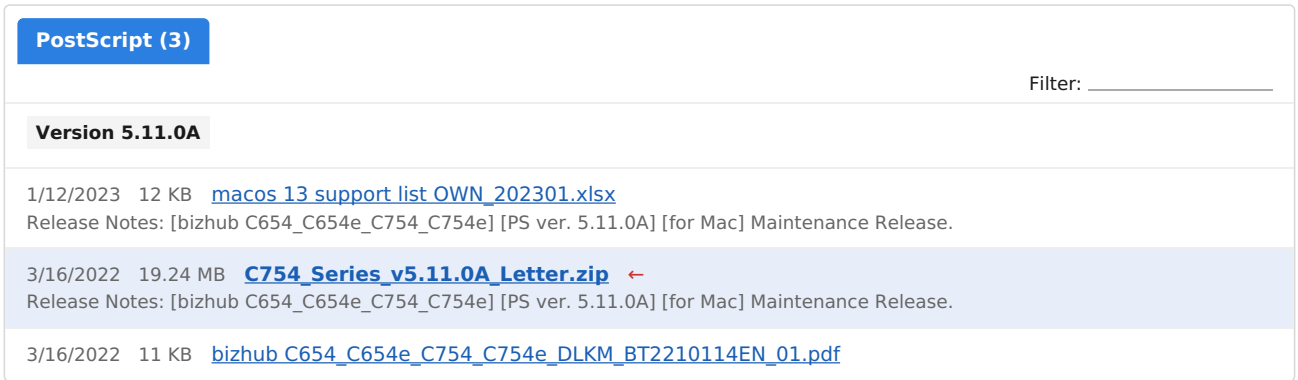

Step 2: Add the Printer

1. **Open System Settings.**
   Click the Apple menu in the top-left corner and select **System Settings**.


2. **Go to Printers & Scanners.**
   In the left sidebar, click **Printers & Scanners**.

3. **Click the + button.**
   Click the **+** (Add Printer, Scanner, or Fax...) button on the right side.

4. **Select the IP (globe) tab.**
   At the top of the Add Printer window, click the middle globe icon to add a printer by IP address.

5. **Enter the printer's information.**
   Fill in the following fields:

   - **Address:** Enter the printer's IP address
   - **Protocol:** Select **LPD** (Line Printer Daemon)
   - **Queue:** Leave blank
   - **Name:** Enter a recognizable name for your printer

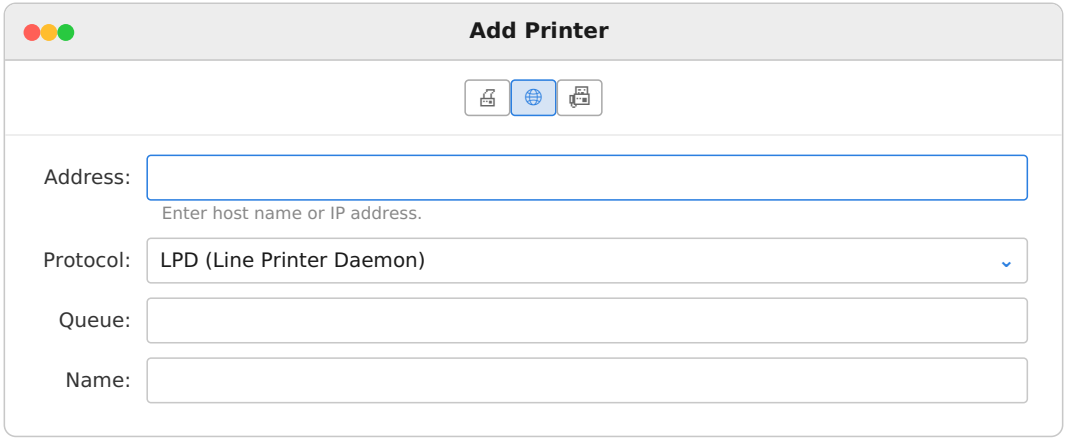

6. **Choose the driver.**
   Click **Choose Driver** → **Select Software**, then choose **KONICA MINOLTA C754e** from the list.

7. **Click Add.**
   Click the **Add** button to install the printer.

Step 3: Enable Finisher Options

1. **Configure the installed accessories.**
   When prompted, enable the following options to match your hardware configuration:

   - **Finisher:** FS-534
   - **Punch Unit:** PK-520 2/3 hole (if installed)

> *i* **Installation Complete** — Your printer is ready to use. Print a test page to verify everything is working. If options appear missing, return to **Printers & Scanners**, select the printer, and click **Options & Supplies** to confirm settings.